



Typical Mounting Location




Mounting Location For Door With Side Glass Panel

Location is customer's choice (glass mounting requires back-up panel).




Mounting Location With Obstruction One Side (Requires Sign To Be Located On Side Opposite Door Handle)

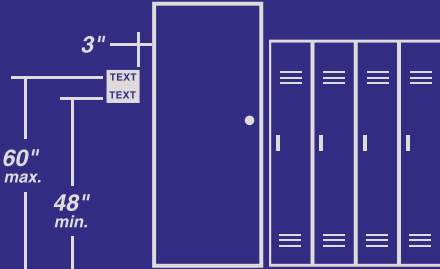


Mounting Location With Not Enough Room On Correct Side


Not enough room for sign installation on door handle side of door. Sign is located on opposite side.



Mounting Location With Not Enough Room Both Sides of Door

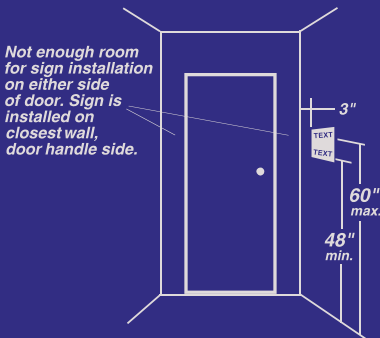

Double Door Mounting Location

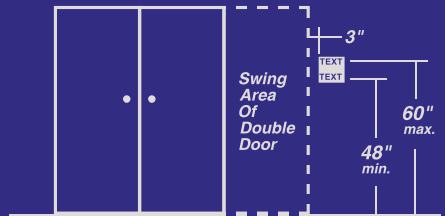

ADA signs are wall mounted next to the appropriate door, on the door handle side of the door, 3" from door jamb and 48" to 60" * from the finished floor to lowest or highest line of sign text. These dimensions are guidelines only and the installer should consult the local building inspector or governing agency before installation. Park Place is not responsible for charges or fines incurred from the incorrect use of these sketches. Please contact Park Place with any questions.

* Minimum mounting height - 48" above floor to lowest line of sign text.
Maximum mounting height - 60" above floor to highest line of sign text.



PARKPLACE
SIGN SYSTEMS INC.
800/650-7275